HYDROSPRING®

HIGH FLOW SYSTEM

Water Softener and Conditioner

- Softer smoother skin and hair
- Cleaner longer lasting clothes
- Cleaner dishes, spotless silverware
- Saves up to 75% on soaps and cleaning supplies
- Easily clean plumbing fixtures and shower parts
- Protect water using appliances
- Saves energy

Made
TO LAST A LIFETIME!

Optional all in one cabinet

A lifetime of soft, conditioned water from HydroSpring™
With over 100 years of combined experience

HYDROSPRING®
HIGH FLOW SYSTEM

Water Softener and Conditioner

Double backwash feature for optimum regeneration, cleaning ability, and efficiency

HyrdoSpring Digital

U.V. Protected Heavy Duty Non-Corrosive Noryl BY-PASS

1¼" Connections

U.V. Protected Heavy Duty Non-Corrosive Noryl Valve

Internals Teflon coated

Solid State Computer Controlled With L.E.D. Display Step By Step User Friendly Controls

Water Resistant Cover

Plain
SYS-HYDROSPRING-R
SYS-HYDROSPRING-M
SYS-HYDROSPRING-L
SYS-HYDROSPRING-XL

Tank Shroud
SYS-HYDROSPRING-TS-M
SYS-HYDROSPRING-TS-L
SYS-HYDROSPRING-TS-XL

Plastic Jacket
SYS-HYDROSPRING-PJ-M
SYS-HYDROSPRING-PJ-L

Full Weld Jacket
SYS-HYDROSPRING-JKT-R
SYS-HYDROSPRING-JKT-M
SYS-HYDROSPRING-JKT-L
SYS-HYDROSPRING-JKT-XL

Plain Cloth Jacket Black
SYS-HYDROSPRING-NP-PLAIN-M
SYS-HYDROSPRING-NP-PLAIN-L
SYS-HYDROSPRING-NP-PLAIN-XL
SYS-HYDROSPRING-NP-PLAIN-GY-L
SYS-HYDROSPRING-NP-HS-M
SYS-HYDROSPRING-NP-HS-L
SYS-HYDROSPRING-NP-HS-XL

OPTIONAL 2nd Multi Media Tank

Where troublesome water requires additional treatment. Contact your local dealer for more information on adding a 2nd multi-media tank.

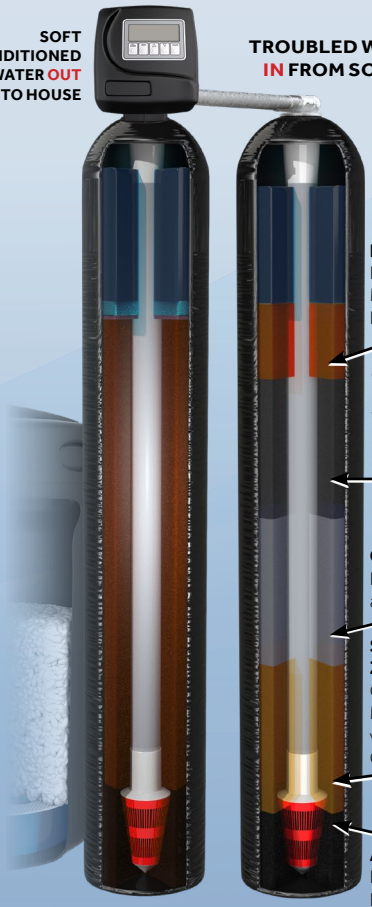

Choose from a variety of media for your specific needs.

Your solution for well water applications, or for removal of a wide range of problems including Iron, Hydrogen Sulfide, Manganese, Heavy Chlorine, Bad Tastes, Bad Colors, or Bad Odors.

	HYDROSPRING-M	HYDROSPRING-L	HYDROSPRING-XL	HYDROSRPING-C
VALVE FLOW RATE *	30 GPM	30 GPM	30 GPM	30 GPM
SYSTEM FLOW RATE *	27 GPM	27 GPM	27 GPM	27 GPM
BYPASS SIZE	1"	1"	1.25"	1"
SOFTENING CAPACITY	32,000 Grains	48,000 Grains	64,000 Grains	32,000 Grains
RESIN VOLUME	1.0 CUFT	1.5 CUFT	2.0 CUFT	1.0 CUFT
MEDIA TANK SIZE DXH	9" x 48"	10" x 54"	12" x 52"	10" x 35"
BRINE/SALT TANK SIZE	15" x 35" Square	15" x 35" Square	15" x 35" Square	NA
SHIPPING WEIGHT SYSTEM	98 lbs.	125 lbs.	150 lbs.	106 lbs.
SHIPPING WEIGHT BRINE	14 lbs.	14 lbs.	14 lbs.	NA
TANK	*Pressure drop at flow rates listed is less than 15 PSI .			

BUILT TO LAST A LIFETIME!

NSF COMPONENT

The Clack® WS-1 valve used in this system has been tested and certified by NSF to NSF/ANSI 44 Residential Cation Exchange Water Softeners.

The United Tanks® used in this system has been tested and certified by NSF to NSF/ANSI 44 Residential Cation Exchange Water Softeners, NSF/ANSI/CAN 61 for Residential Drinking Water System Components—Health Effects, and NSF/ANSI 372 for lead content in Residential Drinking Water System Components.

**The Resintech CN8 Cation Resin used in this system has been tested and certified by WQA to NSF/ANSI 44 Residential Cation Exchange Water Softeners.

MEMBER Water Quality ASSOCIATION

TWQA

Assembled in USA

© Waterworld USA, Inc. 2025